



	(continued of page 1)
H332 Harr	nful if inhaled.
H335-H33	6 May cause respiratory irritation. May cause drowsiness or dizziness.
 Precaution 	ary statements
P233 Kee	away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
P240 Grou	nd and bond container and receiving equipment.
P303+P36 shower].	1+P353 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water [or
P403+P23	3 Store in a well-ventilated place. Keep container tightly closed.
P501 Disp	ose of contents/container in accordance with local/regional/ national/international regulations.
• 2.3 Other	hazards
 Results of 	PBT and vPvB assessment
 PBT: 	
Not applic	able.
 vPvB: 	
Not applic	able.

• Description:	l characterization: Mixtures	
Mixture of sul	ostances listed below with nonhazardous additions.	
• Dangerous co	omponents:	
CAS Number		%
67-63-0	propan-2-ol	5,00- 10,0
	EC number: 200-661-7	
	Record number 01-2119457558-25	
	🚸 Flam. Liq. 2 - H225; 🔱 Eye Irrit.	
	2 - H319, STOT SE 3 - H336	
107-98-2	1-methoxy-2-propanol	10,00- 25,0
	EC number: 203-539-1	
	Record number 01-2119457435-35	
	🚸 Flam. Liq. 3 - H226; 🔱 STOT SE 3 -	
	H336	
111-76-2	2-butoxyethanol	5,00- 10,0
	EC number: 203-905-0	
	Record number 01-2119475108-36	
	🔗 Acute Tox. 3 - H311; 안 Acute Tox.	
	4 - H302, Acute Tox. 4 - H332, Skin Irrit. 2	
	- H315, Eye Irrit. 2 - H319	
123-42-2	4-hydroxy-4-methylpentan-2-one	10,00- 25,
	EC number: 204-626-7	
	Record number 01-2119473975-21	
	🚸 Flam. Liq. 3 - H226; 🔱 Eye Irrit.	
	2 - H319, STOT SE 3 - H335;	
	Eye Irrit. 2; H319: C >= 10 %	
687-47-8	ethyl (S)-2-hydroxypropionate	10,00- 25,
	EC number: 211-694-1	
	Record number 01-2119516234-49	
	🍄 Eye Dam. 1 - H318; 🚸 Flam. Liq. 3	



Reviewed on: 10/01/2023 Printing date: 10/01/2023

	PRODUCT :	VARIVA SOLVA 8775-00 WIPE	
k.		- H226; 🚸 STOT SE 3 - H335	(continued of page 2)
	112-07-2	2-butoxyethyl acetate EC number: 203-933-3	10,00- 25,00
*		Record number 01-2119475112-47 Acute Tox. 4 - H312, Acute Tox. 4 -	
T	 Additional For the wo 	H332 <i>information:</i> rding of the listed risk phrases refer to section 16.	

SECTION 04: First aid measures

• 4.1 Description of first aid measures

General information:

Symptoms of poisoning may even occur after several hours; therefore medical observation for at least 48 hours after the accident.

- After inhalation:
- Supply fresh air. If required, provide artificial respiration. Keep patient warm. Consult doctor if symptoms persist. *After skin contact:*
- Immediately wash with water and soap and rinse thoroughly.
- After eye contact:
- Rinse opened eye for several minutes under running water. Then consult a doctor.
- After swallowing:
- Do not induce vomiting; call for medical help immediately.
- Information for doctor:
- 4.2 Most important symptoms and effects, both acute and delayed
- No further relevant information available.
- 4.3 Indication of any immediate medical attention and special treatment needed No further relevant information available.

SECTION 05: Firefighting measures

- 5.1 Extinguishing media
- Suitable extinguishing agents:
- CO2, powder or water spray. Fight larger fires with water spray or alcohol resistant foam.
- For safety reasons unsuitable extinguishing agents: Water with full jet
- 5.2 Special hazards arising from the substance or mixture
- Formation of toxic gases is possible during heating or in case of fire.
- 5.3 Advice for firefighters
- Protective equipment:
- Mouth respiratory protective device.

Do not inhale explosion gases or combustion gases.

Additional information
 Cool endangered receptacles with water spray.
 Collect contaminated fire fighting water separately. It must not enter the sewage system.

SECTION 06: Accidental release measures

- 6.1 Personal precautions, protective equipment and emergency procedures
 Wear protective equipment. Keep unprotected persons away.
 Ensure adequate ventilation
- 6.2 Environmental precautions:
- Do not allow product to reach sewage system or any water course.
- Prevent seepage into sewage system, workpits and cellars.
- Inform respective authorities in case of seepage into water course or sewage system.
- In case of seepage into the ground inform responsible authorities.
- In case of gas release or seepage into the ground inform responsible authorities.
- Do not allow to enter sewers/ surface or ground water.
- 6.3 Methods and material for containment and cleaning up:

(continued on page 4)



Reviewed on: 10/01/2023 Printing date: 10/01/2023


	(continued of page 3)
Absorb	with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust).
	utralising agent.
	e contaminated material as waste according to item 13.
	adequate ventilation.
	erence to other sections
See Se	ction 7 for information on safe handling.
	ction 8 for information on personal protection equipment.
	ction 13 for disposal information.

SECTION 07: Handling and storage

•	Handling:
---	-----------

- 7.1 Precautions for safe handling Ensure good ventilation/exhaustion at the workplace. Open and handle receptacle with care. Take note of emission threshold. Ensure good interior ventilation, especially at floor level. (Fumes are heavier than air). Information about fire - and explosion protection: Keep ignition sources away - Do not smoke. Protect against electrostatic charges. Prevent impact and friction. • 7.2 Conditions for safe storage, including any incompatibilities
- Storage:
- Requirements to be met by storerooms and receptacles: Store in a cool location. Store only in the original receptacle.
- Information about storage in one common storage facility: Not required.
- Further information about storage conditions: Keep container tightly sealed. Store in cool, dry conditions in well sealed receptacles. Protect from heat and direct sunlight. 7.3 Specific end use(s)
- No further relevant information available.

SECTION 08: Exposure controls/personal protection



with limit values that require monitoring at the workplace:

67-63-0	propan-2-ol		
WEL			
Shor	t-term value	1250	mg/m3
		500	ppm
Long	j-term value	999	mg/m3
		400	ppm
107-98-2	1-methoxy-2-propa	nol	
WEL			
Shor	t-term value	560	mg/m3
		150	ppm
Long	j-term value	375	mg/m3
		100	ppm
Sk			
111-76-2	2-butoxyethanol		
			(continued on page 5



			(continued of page 4
WEL			(continued of page 4
	ort-term value	246	mg/m3
		50	ppm
Lc	ong-term value	123	mg/m3
	-	25	ppm
Sk	k, BMGV		
123-42-2	4-hydroxy-4-met	hylpentan-2-one	
WEL			
Sh	ort-term value	362	mg/m3
		75	ppm
Lo	ong-term value	241	mg/m3
		50	ppm
112-07-2	2-butoxyethyl ac	etate	
WEL			
Sh	ort-term value	332	mg/m3
		50	ppm
Lo	ong-term value	133	mg/m3
		20	ppm
 Ingredients 	s with biological limit values		
111-76-2	2-butoxyethanol	•	
BMGV			
	0 mmol/mol creatinine		
Me	edium: urine		
Sa	mpling time: post shift		
Pa	rameter: butoxyacetic ac	id	
 Additional The lists value 	<i>information:</i> alid during the making were	used as basis.	
• 8.2 Exposi			
 General pr 	protective equipment: rotective and hygienic meas		
	precautionary measures are from foodstuffs, beverages	e to be adhered to when handling chemi	cals.
Immediate	ly remove all soiled and cor		
	act with the eyes. act with the eyes and skin.		
Do not eat	or drink while working.		
	clean skin thoroughly after y protection: In case of brie	work and before breaks. f exposure or low pollution use respirato	ry filter device. In case of intensive
or longer e	xposure use self-contained	respiratory protective device. Suitable r	
recommen • Protection		al has to be impermeable and resistant t	to the product/ the substance/ the
preparation preparation	n. Due to missing tests no r n/ the chemical mixture. Se n and the degradation Prote	ecommendation to the glove material ca lection of the glove material on consider ctive gloves Impervious gloves	n be given for the product/ the
The select varies from the glove n	ion of the suitable gloves do n manufacturer to manufact	bes not only depend on the material, but urer. As the product is a preparation of s ed in advance and has therefore to be cl	several substances, the resistance
	i uno oi giove material		
		e found out by the manufacturer of the p	protective gloves and has to be



Reviewed on: 10/01/2023 Printing date: 10/01/2023

PRODUCT : VARIVA SOLVA 8775-00 WIPE

(continued of page 5) The determined penetration times according to EN 374 part III are not performed under practical conditions. Therefore a maximum wearing time, which corresponds to 50% of the penetration time, is recommended. • Eye protection: Safety glasses Tightly sealed goggles

Body protection: Protective work clothing

SECTION 09: Physical and chemical properties

9.1 Information on basic physical and che	emical properties
Appearance	
Appearance:	
Form:	Liquid
Colour:	According to product specifica
Odour:	Characteristic Characteristic
Odour threshold:	Not determined.
Change in condition	
Initial boiling point and boiling range:	82 °C
Flash point:	13 °C
Flammability (solid, gas):	Not applicable.
Ignition temperature:	240 °C
Decomposition temperature:	Not determined.
Auto-ignition temperature:	Not determined.
Explosive properties:	Not determined.
Explosion limits:	
Lower:	1 Vol %
Upper:	20 Vol %
Vapour pressure:	at 20 °C 0,4000 mbar
Density:	0,9600 g/cm3
Solubility in / Miscibility with	
water:	Not determined.
Viscosity:	
	Not determined.
	Not determined.
9.2 Other information	No further relevant information available.

SECTION 10: Stability and reactivity

- 10.1 Reactivity
- No further relevant information available.
- 10.2 Chemical stability
- Thermal decomposition / conditions to be avoided: No decomposition if used according to specifications.
- 10.3 Possibility of hazardous reactions No dangerous reactions known.
- 10.4 Conditions to avoid
- No further relevant information available.
- 10.5 Incompatible materials: No further relevant information available.
- 10.6 Hazardous decomposition products:
- No dangerous decomposition products known.



Reviewed on: 10/01/2023 Printing date: 10/01/2023

RODUCT :	VARIVA SOLVA 8775-00 WIPE
ECTION 11	(continued of page : Toxicological information
 11.1 Inform Acute toxic 	nation on toxicological effects
	lues relevant for classification:
67-63-0	propan-2-ol
	5045 mg/kg (rat)
	50: 12800 mg/kg (Rabbit)
Inhalative, I	.C50/4h: 30 mg/l (rat)
107-98-2	1-methoxy-2-propanol
	5660 mg/kg (rat) 50: 13000 mg/kg (Rabbit)
	.C50/4h: 6 mg/l (rat)
111-76-2	2-butoxyethanol
	1746 mg/kg (rat)
Oral, LD50:	1414 mg/kg (guinea Pig)
	50: 2000 mg/kg (rat)
	50: 1000 mg/kg (Rabbit) 50: 2000 mg/kg (guinea Pig)
123-42-2	4-hydroxy-4-methylpentan-2-one
	4000 mg/kg (rat)
	50: 13630 mg/kg (Rabbit)
687-47-8	ethyl (S)-2-hydroxypropionate
	>5000 mg/kg (rat)
Dermal, LD	50: >5000 mg/kg (Rabbit)
112-07-2	2-butoxyethyl acetate
	2400 mg/kg (rat)
 Dermal, LD Primary irrit 	50: 1580 mg/kg (Rabbit)
 Skin corros 	on/irritation
No irritant e	ffect.
	damage/irritation
	nt with the danger of severe eye injury. or skin sensitisation
	ng effects known.
 Additional 	toxicological information:
	shows the following dangers according to the calculation method of the General EU Classification
Guidelines Harmful	or Preparations as issued in the latest version:
Irritant	
• 11.2 Inform	nation on other hazards
	lisrupting properties
None of	the ingredients is listed.
	: Ecological information
 12.1 Toxicit Aquatic toxi 	
	elevant information available.
	tence and degradability
	elevant information available.
	in environmental systems:
	eumulative potential elevant information available.
• 12.4 Mobilit	y in soil
	elevant information available.
	ecological information:
 General not Water baza 	<i>es:</i> rd class 1 (German Regulation) (Self-assessment); slightly hazardous for water

Water hazard class 1 (German Regulation) (Self-assessment): slightly hazardous for water
 Do not allow undiluted product or large quantities of it to reach ground water, water course or sewage system.
 Must not reach sewage water or drainage ditch undiluted or unneutralised.
 12.5 Results of PBT and vPvB assessment

(continued on page 8)



(continued of page 7)

4225901

Reviewed on: 10/01/2023 Printing date: 10/01/2023



• *PBT*:

Not applicable.

• *vPvB*:

Not applicable. 12.6 Other adverse effects

No further relevant information available.

SECTION 13: Disposal considerations


```
• 13.1 Waste treatment methods
```

```
    European and swiss waste code

            B
            WASTES FROM THE MANUFACTURE, FORMULATION, SUPPLY AND USE (MFSU) OF
            COATINGS (PAINTS, VARNISHES AND VITREOUS ENAMELS), ADHESIVES, SEALANTS
            AND PRINTING INKS
            O8 01
            wastes from MFSU and removal of paint and varnish
            O8 01 11
            waste paint and varnish containing organic solvents or other hazardous substances
```

Uncleaned packaging:

Recommendation: Disposal must be made according to official regulations.

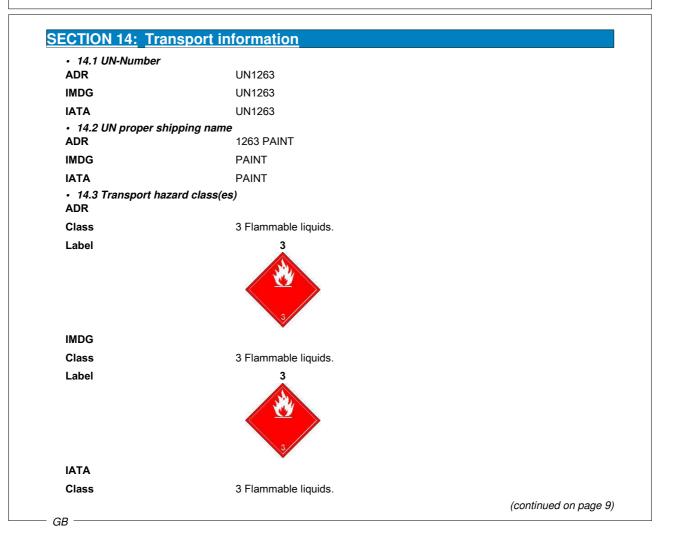



Reviewed on: 10/01/2023 Printing date: 10/01/2023

Label	3	(continued of page 8
• 14.4 Packing group		
ADR	II	
IMDG	II	
ΙΑΤΑ	II	
 14.5 Environmental hazards Not applicable. 14.6 Special precautions fo Warning: Flammable liquids. 	r user	
Danger code (Kemler):	33	
EMS Number:	F-E,S-E	
• 14.7 Transport in bulk acco Not applicable.	rding to Annex II of MARPOL73/78 an	d the IBC Code
 Transport/Additional inform Not applicable. 		
Excepted quantities (EQ):	E2	
Limited quantities (LQ)	5L	
Transport category	2	
Tunnel restriction code	D/E	
IMDG		
Limited quantities (LQ)	5L	
Excepted quantities (EQ)	E2	
 UN "Model Regulation": 		

SECTION 15: Regulatory information

- 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture
- DIRECTIVE 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment - Annex II
- None of the ingredients is listed. • REGULATION (EU) 2019/1148
- Annex I RESTRICTED EXPLOSIVES PRECURSORS (Upper limit value for the purpose of licensing under Article 5(3))
- None of the ingredients is listed.
- Annex II REPORTABLE EXPLOSIVES PRECURSORS None of the ingredients is listed.
- REGULATION (EC) No 1907/2006 ANNEX XVII Conditions of restriction: 3, 40

National regulations:

- Technical instructions (air):
- Class Share in %
 - 9,90

• Waterhazard class:

Water hazard class 1 (Self-assessment): slightly hazardous for water.

- 15.2 Chemical safety assessment:
- A Chemical Safety Assessment has not been carried out.

•

Τ



4225901

	PRODUCT :	VARIVA SOLVA 8775-00 WIPE
		(continued of page 9)
	SECTION 16	6: Other information
* * * * * *		ion is based on our present knowledge. However, this shall not constitute a guarantee for any specific res and shall not establish a legally valid contractual relationship. hrases Highly flammable liquid and vapour. Flammable liquid and vapour. Harmful if swallowed. Toxic in contact with skin. Harmful in contact with skin. Causes skin irritation. Causes serious eye damage. Causes serious eye irritation. Harmful if inhaled. May cause respiratory irritation.
*	H336	May cause drowsiness or dizziness.
	Environme - Abbreviatio ADR: Acco concerning RID: Règle (Regulatior IMDG: Inte IATA: Inter ICAO: Intel GHS: Glob EINECS: E CAS: Cher LC50: Leth LD50: Leth PBT: Persi vPvB: very	Int issuing MSDS: Int protection department. Int protection department. International carriage of Dangerous Goods by Road) International Carriage of Dangerous Goods by Road) International Carriage of Dangerous Goods by Road) International concernant le transport des marchandises dangereuses par chemin de fer International concernant le transport of Dangerous Goods by Rail) International Air Transport Association Intaional Air Transport Association Intaional Civil Aviation Organisation International Civil Aviation Organisation International Civil Aviation Organisation International Abstracts Service (division of the American Chemical Substances Iuropean List of Notified Chemical Substances Iuropean List of Notified Chemical Substances Internation, 50 percent Intel Abstracts Service (division of the American Chemical Society) Intel concentration, 50 percent Intel dose, 50 percent Intel