

WE MAKE THE WORLD LAST LONGER

Teknos is a global coatings company with operations in more than 20 countries. Teknos is one of the leading suppliers of industrial coatings with a strong position in retail and architectural coatings.

Teknos wants to make the world last longer by providing smart, technically advanced paint and coating solutions to protect and prolong. Teknos always works in close cooperation with its customers. Teknos was established in 1948 and is one of Finland's largest family-owned businesses. For further information, visit www.teknos.com.



TEKNOGLAD SILVER

Pre-weathered, sacrificial
coating for cladding

Standard colour range

TEKNOS TEKNOCLAD SILVER FOR WOOD



Light Grey




Silver Grey



Sand Grey




Concrete Grey

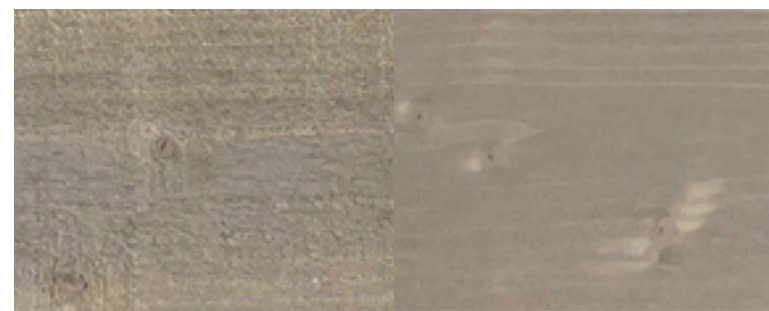

Stone Grey



Slate Grey

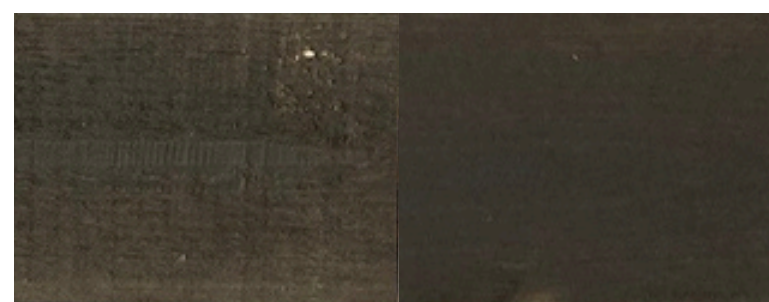


Basalt Brown



Coal Brown




Lime Brown

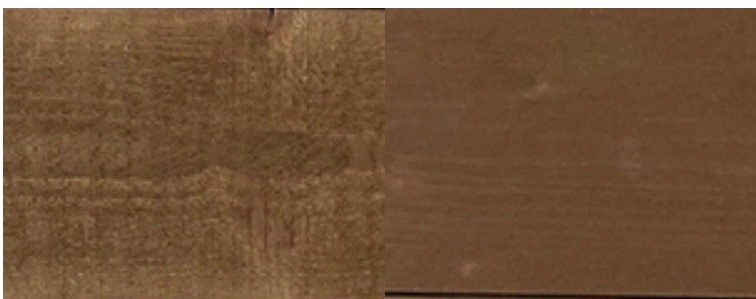

Clay Brown

Colour range images display 1 coat of TEKNOCLAD SILVER applied to planed, sanded Larch

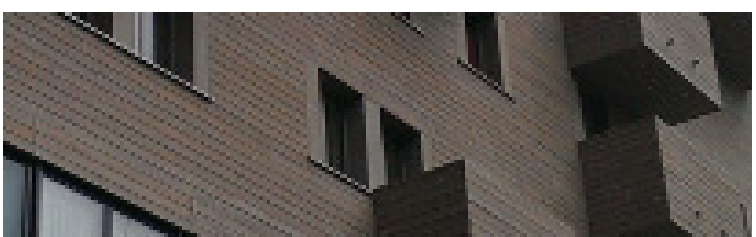

A WEATHERED LOOK FOR NEW CLADDING, WHICH ALSO PROTECTS

Allows new cladding to blend seamlessly with the surroundings by giving a lightly weathered look to wooden substrates.

HOW IT WORKS


The water-borne coating reduces moisture ingress which protects the wood while the natural weathering process takes place. By reducing the swelling and shrinkage of the wood the coating encourages a more evenly weathered surface.

ONE-COAT PRODUCT

You only need one coat to achieve this look and protect the wood from moisture, making sure that you coat the joints as well as the front and back of each cladding board.

APPLICATION

TEKNOCLAD SILVER can be applied by airless, airmix spray or brush machine and is suitable for Spruce, Fir, Larch and Douglas Fir.

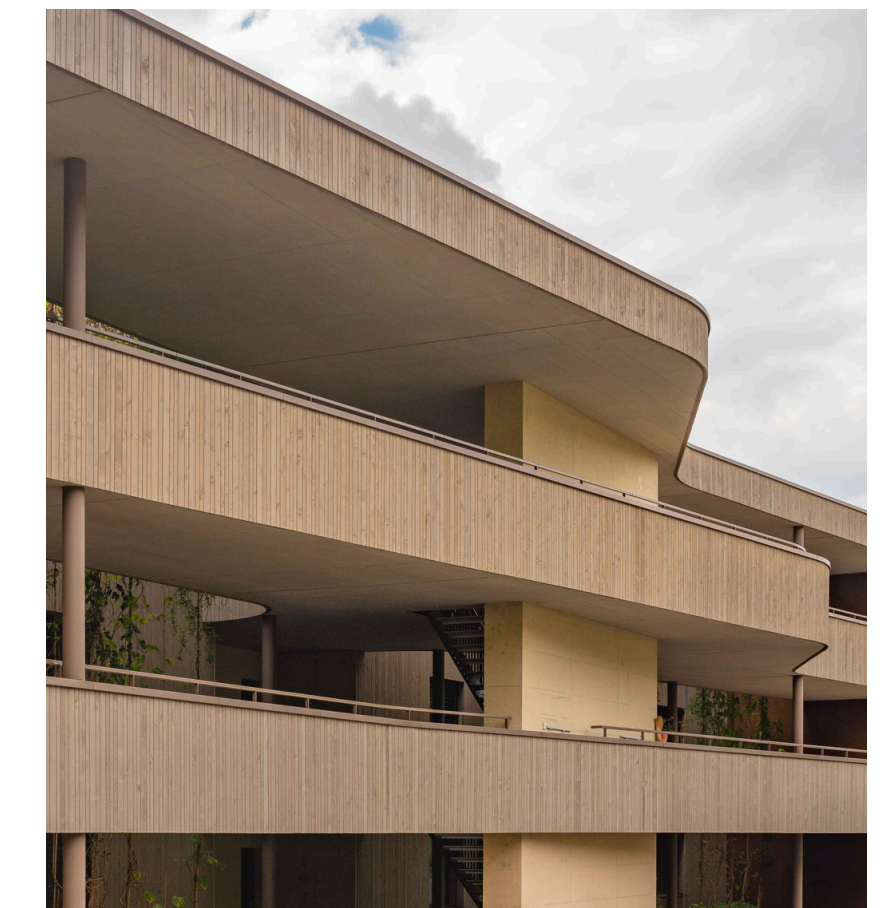

APPLICATION GUIDE FOR TEKNOCLAD SILVER

PLANED/SANDED WOOD

Layer 1	TEKNOCLAD SILVER	80-100 g/m ²
---------	------------------	-------------------------

ROUGH SAWN WOOD

Layer 1	TEKNOCLAD SILVER	120-150 g/m ²
---------	------------------	--------------------------

*Pretreatment is required for timber substrates not meeting Durability Class 3, EN 350:2016. Teknos preservative products meeting the requirements of EN599-1



CONTACT US

For more information on the TEKNOCLAD SILVER system for cladding, contact your local Teknos coating expert.

Colour accuracy statement

We have produced this colour card as accurately as the printing process will allow. However, paint versions of these colours may be a shade different therefore we cannot guarantee an exact match. Once paint is applied, the substrate and texture of a surface can change the appearance of the final colour, as can adjacent coloured surfaces and lighting. Before committing to a large order we recommend testing the paint colour on the actual surface to be painted.

